


RUSCOTM inc.

AUTOMATIC FLUSH VALVE

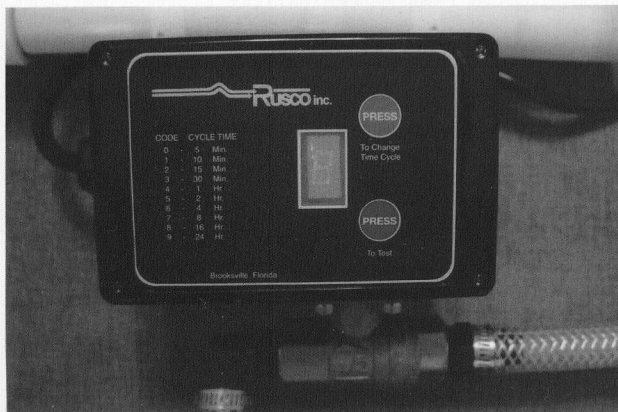

PART NUMBER

AFV
AFV-KIT

AFV-KIT Includes:

- (2) 1/2" Barb x 1/2" NPT male hose fittings
- (2) SAE size 8 SS worm drive clamps
- (24") 1/2" braid reinforced flexible PVC tubing.
(rated at 215 PSI)


Kit does not include filter or automatic flush valve.

Please note: To insure optimum performance of automatic flush valve, it is recommended that you use the above rated tubing only.

SPECIFICATIONS

Adjustable cycle time5 min. - 24 hours
 Working Pressure200 PSIG
 Ambient Temperature35°F to 165°F
 Enclosure.....Nema 4
 Voltage115V, 1 Phase, 60HZ
 Current.....2.5 Amps
 Valve Construction.....Brass
 SealsReinforced Teflon
 Discharge Volume.....1/2" NPT-.92
 (Gal per cycle @ 30 PSIG)
 Power cord.....8 ft. heavy-duty grounded
 Full-Port Ball Valve1/2" NPT
 Discharge Time.....3.5 seconds
 (Non-Adjustable)

SUGGESTED INSTALLATION

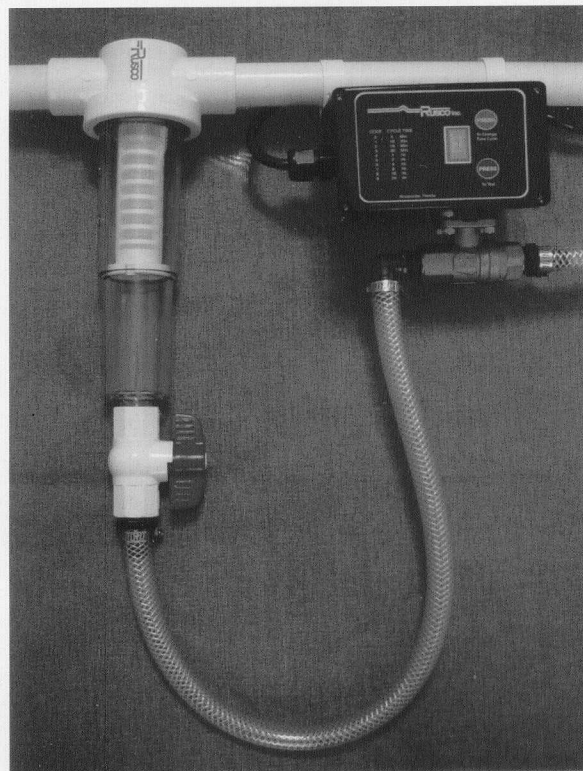

Phone: 352-597-2522
Toll Free 1-800-345-1033
Fax: 352-596-9489
Email: info@rusco.com

