

SPECIFICATIONSINSTANT CHILLED WATER SYSTEM • MODEL WI-WIC400S


Undercounter water chiller for use with sink mounted dispenser faucet.

- Refrigeration Capacity: Chilling capacity of 1.75 gallons (6.6 Liters) per hour of drinking water, according to standard ARI 1010 (2002).
- Installation: Quick and easy fast connection by 1/4" quick connect fittings.
- Cabinet: Powder coated galvanized steel.
- Water Temperature Regulation: Cold control located inside cabinet, with easy external dial.
- **Cooling Unit:** Maintenance-free 1/12 HP compressor protected by an automatically restarting motor cut-off. The refrigeration system is hermetically sealed to virtually eliminate refrigerant gas leakage.
- Refrigerant Gas: HFC 134a, which offers a zero ODP (Ozone Depletion Potential).
- Waterways: Highest quality lead free NSF approved materials (304 Stainless Steel).
- Refrigeration Tank: 1.2 gallons (4.4 liters).
- Electrical Data: 2.07 Amps, 115 Volts, 60 Hz, monophase
- Dimensions: 11 1/2" Height

10 1/2" Width

15" Depth (without plug)

- Shipping Weight: 36 lbs.
- · Easy access drain plug.
- Supplied with 2 ft. long insulation.
- Can be used with any quality drinking water system for protection against bad tastes, lead, asbestos, rust chlorine, cysts, V.O.C.'s, THM's, and other contaminants.

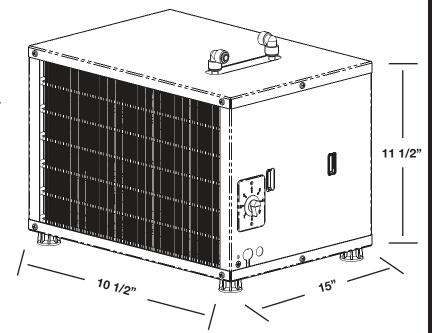



Your Source For Premium Quality Products For The Kitchen, Bath, and Home

Tel: (800) 322-9283 • Fax: (310) 885-4385 www.waterinc.com

One Year Limited Parts & Labor Warranty. Water, Inc. warrants this product to be free from defects in workmanship or materials for a period of twelve months after purchase.

Water Inc. Electric Air Cooled Water Chillers have been approved and listed by ETL.

MODEL WI-WIC400S TECHNICAL DATA		
COMPRESSOR TYPE		
VOLTAGE	115 V	
HERTZ	60Hz	
COOLING CAPACITY	130 Watts	
POWER CONSUMPTION	103 Watts	
CURRENT	1.20 Amps	
COMPRESSOR DISPLACEMENT	2.27 CM3	
TESTED AT ROOM TEMPERATURE	90° F	°C 32
DELIVERY PER HOUR	1.75 GAL.	LT. 6.6
WATER OUTLET TEMPERATURE	50°	°C 10
TANK CAPACITY	1.2 GAL.	LT. 4.4
FITTINGS	1/4" QUICK CONNECT	
REFRIGERANT GAS CHARGE	68 GRAMS	
REFRIGERANT GAS	R134a	
POWER SUPPLY	115/1/60 (V/n/Hz)	
COMPRESSOR TYPE	HERMETIC	
CONDENSER	AIR COOLED	
EVAPORATOR	EXTERNAL TUBE	
EXPANSION DEVICE	CALIBRATED CAPILLARY TUBE	
CONTROL	ADJUSTABLE THERMOSTAT	
DIMENSIONS: WIDTH	10 1/2"	
DEPTH	15"	
HEIGHT	11 1/2"	
NET WEIGHT	32 LBS.	
SHIPPING WEIGHT	36 LBS.	



Tel: (800) 322-9283 Fax: (310) 885-4385 www.waterinc.com