


Materials: AISI 304 or AISI 316

O-ring: silica gel, EPDM...

Max working pressure: 300 PSI (150 PSI for B style)


Max working temperature: 97°C

Conform to NSF 42 standard

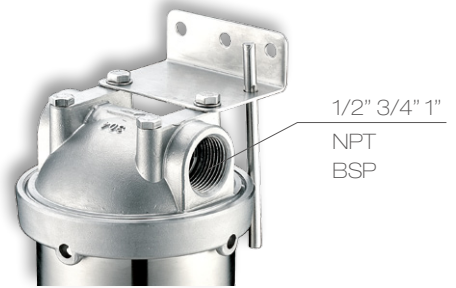

A

Model	mm		In/outlet	
	L	D		
HMS-	5A	221(230)	106	1/2" 3/4" (1")
	10A	346(355)	106	1/2" 3/4" (1")
	20A	600(609)	106	1/2" 3/4" (1")
	30A	854(864)	106	1/2" 3/4" (1")
	40A	1108(1118)	106	1/2" 3/4" (1")

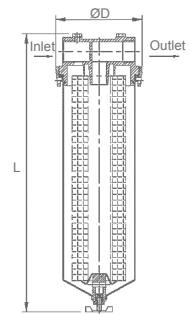


05



B

Model	mm		In/outlet	
	L	D		
HMS-	5B	184(193)	106	1/2" 3/4" (1")
	10B	309(318)	106	1/2" 3/4" (1")
	20B	563(572)	106	1/2" 3/4" (1")
	30B	817(826)	106	1/2" 3/4" (1")
	40B	1071(1080)	106	1/2" 3/4" (1")

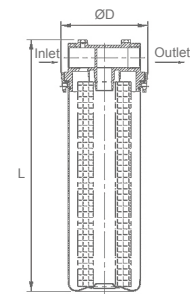

C

Model	mm		In/outlet	
	L	D		
HMS-	5C	215(224)	106	1/2" 3/4" (1")
	10C	340(349)	106	1/2" 3/4" (1")
	20C	594(603)	106	1/2" 3/4" (1")
	30C	848(858)	106	1/2" 3/4" (1")
	40C	1102(1112)	106	1/2" 3/4" (1")

