

HMF Big blue filter housing series
for quick-fit cartridges with double O-ring

APPLICATIONS

Domestic use: filtration and treatment of drinking water, protection of taps, boilers, washing machines, and other installations.

Technical use: pre-filtration, micro-filtration; protection of pumps, heating systems, softeners, demineralising and chlorine-removing appliances.

WORKING CONDITIONS

Max working pressure _____ 300 PSI.

Max working temperature _____ 97°C

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

Head and Sump: AISI 304 or AISI 316.

O-ring: Silical gel, EPDM...

Pass NSF certification against NSF 42 standard



FEATURES

Heavy duty construction.

Quick-fit for 4.5" width DOE cartridges

Double O-ring ensures perfect watertight

How to Open: Use stainless steel rod (included) or optional spanner wrench to unscrew lock ring at top of filter. Unthread and the filter sump will be able to be removed.

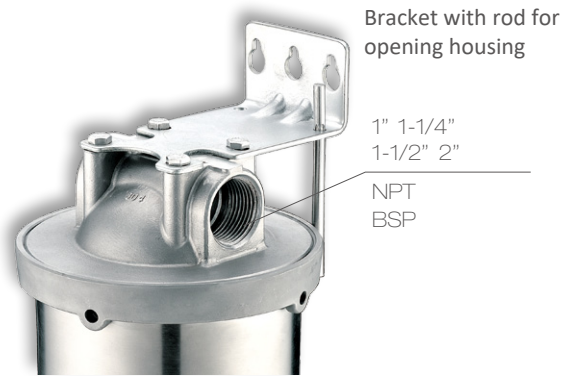

Model	IN/OUT Threads	mm	
		L	D
HMF-10A/10C	1"	375	Ø146
	1 1/4"	390	Ø146
	1 1/2"	400	Ø146
	2"	410	Ø146
HMF-20A/20C	1"	630	Ø146
	1 1/4"	645	Ø146
	1 1/2"	655	Ø146
HMF-30A/30C	2"	665	Ø146
	1"	885	Ø146
	1 1/4"	900	Ø146
HMF-40A/40C	1 1/2"	910	Ø146
	2"	920	Ø146
	1"	1140	Ø146
	1 1/4"	1155	Ø146
	1 1/2"	1165	Ø146
	2"	1175	Ø146



HMF Big blue Series